

## DS-8600NI-K8 Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 8/16/32-ch IP camera inputs
- Up to 8-ch@1080p decoding capacity
- Up to 80/160/256 Mbps incoming bandwidth



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Adopt stream over TLS encryption technology which provides more securer stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- 8 SATA interfaces (up to 8 TB capacity for each HDD)
- 8/16-ch synchronous playback

### Smart Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting

### Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Support web access without plug-in




## Specification

Model	DS-8608NI-K8	DS-8616NI-K8	DS-8632NI-K8
<b>Video and Audio</b>			
<b>IP video input</b>	8-ch	16-ch	32-ch
	Up to 8 MP resolution 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
<b>Incoming bandwidth</b>	80 Mbps	160 Mbps	256 Mbps
<b>Outgoing bandwidth</b>	160 Mbps		
<b>HDMI 1 output</b>	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
<b>HDMI 2 output</b>	1920 × 1080p/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
<b>VGA 1 output</b>	1920 × 1080p/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
<b>VGA 2 output</b>	1920 × 1080p/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
<b>Video output mode</b>	HDMI 1 and VGA 1 provide simultaneous video output, and work as the main output; HDMI 2 and VGA 2 provide simultaneous video output, and work as the auxiliary output		
<b>Audio output</b>	2-ch, RCA (Linear, 1 KΩ)		
<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)		
<b>Decoding</b>			
<b>Decoding format</b>	H.265+/H.265/H.264+/H.264/MPEG4		
<b>Recording resolution</b>	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
<b>Synchronous playback</b>	8-ch	16-ch	
<b>Capability</b>	2-ch@8 MP (25 fps)/4-ch@4 MP (30 fps)/8-ch@1080p (30 fps)		
<b>Stream type</b>	Video, Video & Audio		
<b>Audio compression</b>	G.711ulaw/G.711alaw/G.722/G.726		
<b>Network</b>			
<b>Remote connections</b>	128		
<b>Network protocol</b>	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS		
<b>Network interface</b>	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
<b>Auxiliary Interface</b>			
<b>Serial interface</b>	RS-232, RS-485, keyboard		
<b>SATA</b>	8 SATA interfaces		
<b>eSATA</b>	1 eSATA interface		
<b>Capacity</b>	Up to 8 TB capacity for each disk		
<b>Alarm in/out</b>	16/4		
<b>USB interface</b>	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0		
<b>General</b>			
<b>Power supply</b>	100 to 240 VAC, 50 to 60 Hz		
<b>Consumption (without HDD)</b>	≤ 30 W		
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)		
<b>Working humidity</b>	10% to 90%		


<b>Dimension (W × D × H)</b>	445 × 470 × 94 mm (17.5"× 18.5" × 3.7")
<b>Weight (without HDD)</b>	≤ 8 kg (17.6 lb)
<b>Certification</b>	
<b>Obtained Certification</b>	CE, FCC, CB, IC, RCM, KCC, ICE-003
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4-2014
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

# Dimension

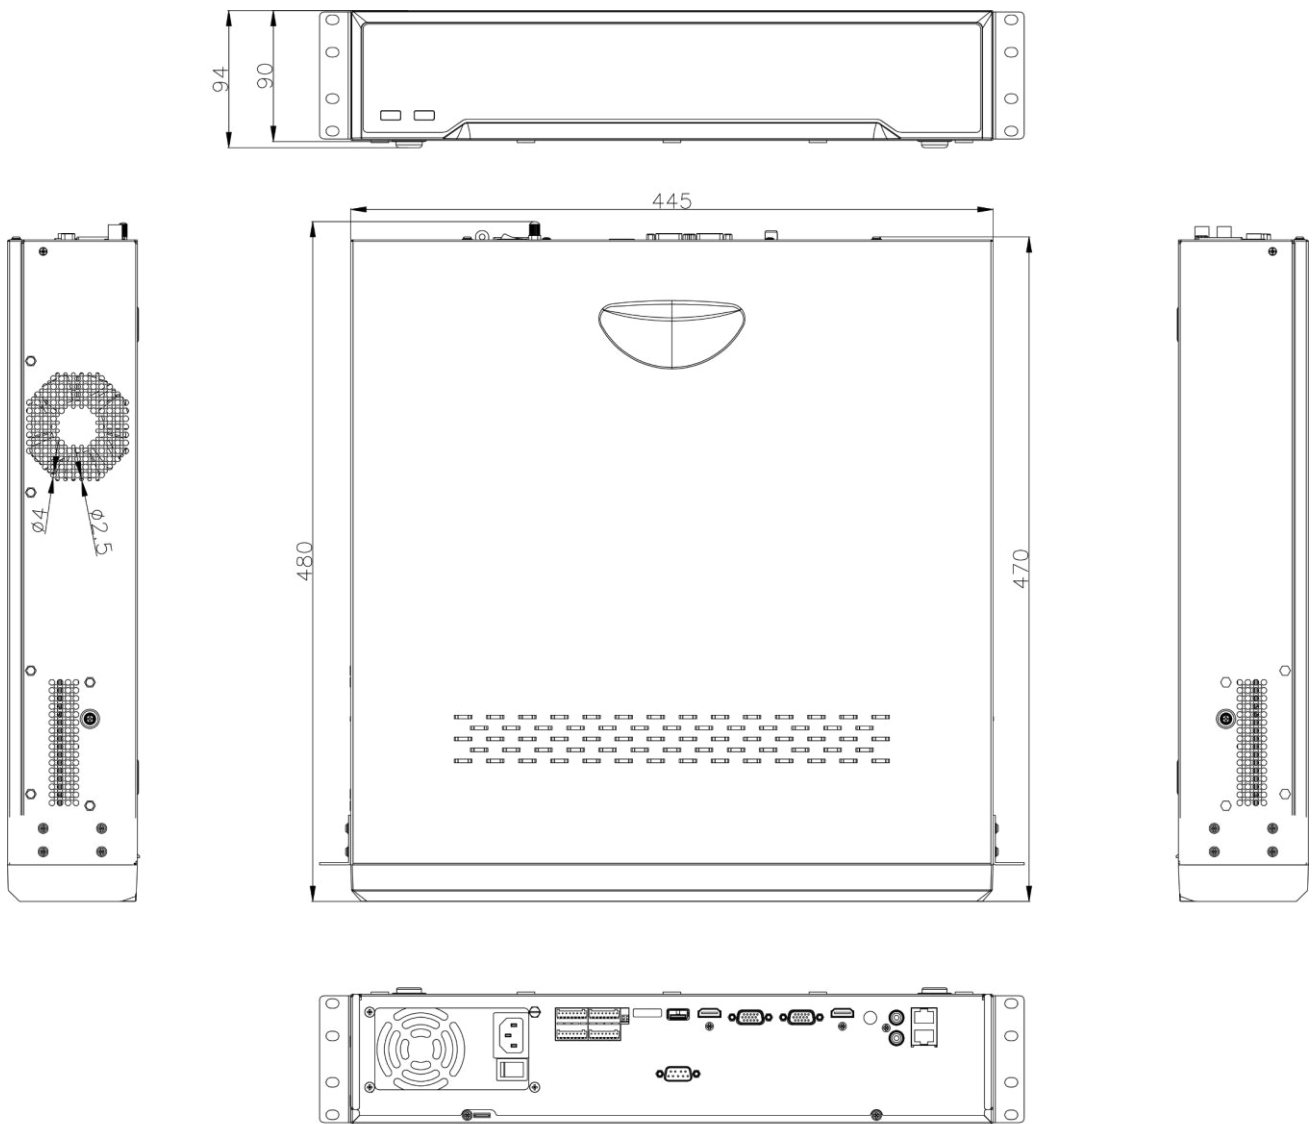

scale/1:1:Unit/mm

## Physical Interface

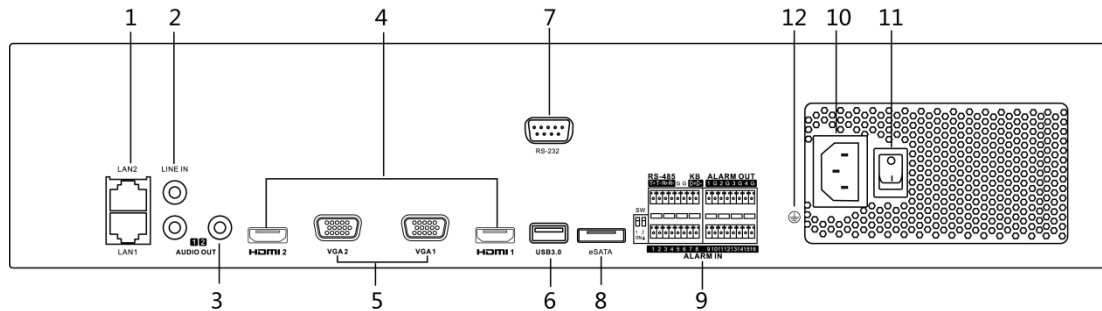

No.	Description	No.	Description
1	LAN1/LAN2 Interface	7	RS-232 Interface
2	LINE IN	8	eSATA Interface
3	AUDIO OUT	9	Alarm In/Alarm Out
4	HDMI1/HDMI2 Interface	10	100 to 240 VAC Power Supply
5	VGA1/VGA2 Interface	11	Power Switch
6	USB 3.0 Interface	12	GND

## Available Model

DS-8608NI-K8, DS-8616NI-K8, DS-8632NI-K8

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 [10] 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33[0]1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com

04500102010319