

DS-2CE16D0T-EXIF 2 MP Fixed Mini Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

▪ Specification

Camera	
Model	DS-2CE16D0T-EXIF
Product Name	2MP Outdoor EXIR Fixed Mini Bullet Camera
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	TVI: 1080p@25fps/30fps AHD: 1080p@25fps/30fps CVI: 1080p@25fps/30fps CVBS: PAL/NTSC
Min. Illumination	0.02 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	2.8 mm, 3.6 mm Fixed Lens
Field of View	2.8 mm, horizontal FOV: 96.5°, vertical FOV: 48.9°, diagonal FOV: 120.5° 3.6 mm, horizontal FOV: 76.9°, vertical FOV: 40.6°, diagonal FOV: 92.0°
Lens Mount	M12
Day & Night	IR Cut Filter
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°
Image	
Image Mode	STD/HIGH-SAT
AGC	Yes
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto
AE (Auto Exposure) Mode	DWDR, BLC, Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, Mirror, Smart IR, Sharpness
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%
Consumption	Max. 3.3 W
Protection Level	IP67
Material	Metal
IR Range	Up to 20 m
Communication	HIKVISION-C
Dimension	138.8 mm × 60.9 mm × 57.9 mm (5.465" × 2.389" 2.278")
Weight	Approx. 260 g (0.57 lb.)

▪ Available Model

DS-2CE16D0T-EXIF(2.8mm)


DS-2CE16D0T-EXIF(3.6mm)

DS-2CE16D0T-EXIF(2.8mm)(MENA)

DS-2CE16D0T-EXIF(3.6mm)(MENA)

DS-2CE16D0T-EXIF(3.6mm)(Chicony)

▪ Dimension

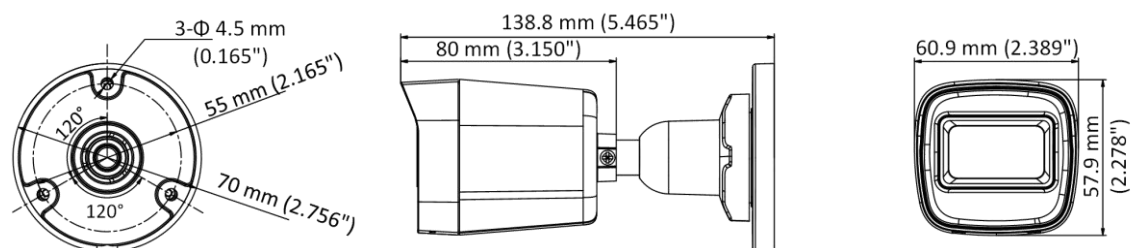

▪ Accessory

▪ Optional

DS-1280ZJ-XS
Junction Box



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

